

### Forme costruttive di base:

rapporto:  
1/1






MS31

rapporto:  
1/1,5 - 1/2 - 1/3 - 1/4



MS32

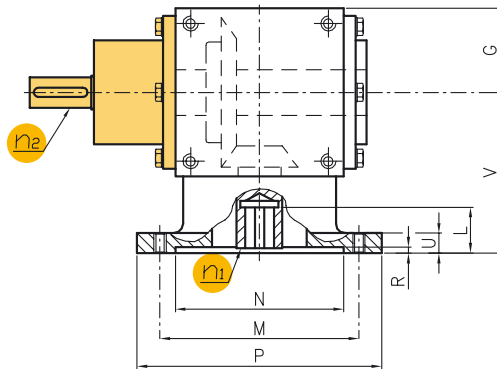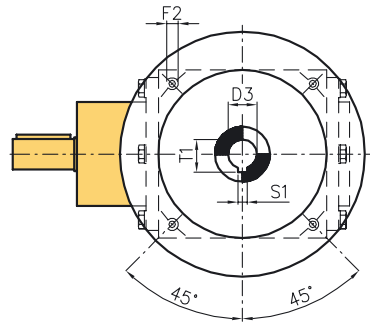


### Motorinvio a due mozzi MRX

| Grandezza     | Flangia IEC | D3 H7  | F2    | G   | L   | M   | N   | P   | R   | S1  | T1   | U    | V    |     |
|---------------|-------------|--------|-------|-----|-----|-----|-----|-----|-----|-----|------|------|------|-----|
| Modelli XMRX* | 86          | 56 B5  | 9     | M6  | 43  | 23  | 100 | 80  | 120 | 4   | 3    | 10,4 | 13   | 90  |
|               |             | 63 B5  | 11    | M8  | 43  | 23  | 115 | 95  | 140 | 4   | 4    | 12,8 | 13   | 90  |
|               |             | 71 B5  | 14    | M8  | 43  | 30  | 130 | 110 | 160 | 4   | 5    | 16,3 | 13   | 90  |
|               |             | 71 B14 | 14    | 7   | 43  | 30  | 85  | 70  | 105 | 4   | 5    | 16,3 | 13   | 90  |
|               |             | 80 B5  | 19    | M10 | 43  | 40  | 165 | 130 | 200 | 4   | 6    | 21,8 | 13   | 100 |
|               |             | 80 B14 | 19    | 7   | 43  | 40  | 100 | 80  | 120 | 4   | 6    | 21,8 | 13   | 100 |
|               | 110         | 63 B5  | 11    | M8  | 55  | 23  | 115 | 95  | 140 | 4   | 4    | 12,8 | 13   | 105 |
|               |             | 71 B5  | 14    | M8  | 55  | 30  | 130 | 110 | 160 | 4   | 5    | 16,3 | 13   | 105 |
|               |             | 71 B14 | 14    | 7   | 55  | 30  | 85  | 70  | 105 | 4   | 5    | 16,3 | 13   | 105 |
|               |             | 80 B5  | 19    | M10 | 55  | 40  | 165 | 130 | 200 | 4   | 6    | 21,8 | 13   | 105 |
|               |             | 80 B14 | 19    | 7   | 55  | 40  | 100 | 80  | 120 | 4   | 6    | 21,8 | 13   | 105 |
|               |             | 134    | 71 B5 | 14  | M8  | 67  | 30  | 130 | 110 | 160 | 5    | 5    | 16,3 | 13  |
|               | 80 B5       |        | 19    | M10 | 67  | 40  | 165 | 130 | 200 | 5   | 6    | 21,8 | 13   | 125 |
|               | 80 B14      |        | 19    | 7   | 67  | 40  | 100 | 80  | 120 | 5   | 6    | 21,8 | 13   | 125 |
|               | 90 B5       |        | 24    | M10 | 67  | 50  | 165 | 130 | 200 | 5   | 8    | 27,3 | 13   | 125 |
|               | 90 B14      |        | 24    | 9   | 67  | 50  | 115 | 95  | 140 | 5   | 8    | 27,3 | 13   | 125 |
| 100-112 B5    | 28          |        | M12   | 67  | 60  | 215 | 180 | 250 | 5   | 8   | 31,3 | 13   | 135  |     |
| 166           | 100-112 B14 | 28     | 9     | 67  | 60  | 130 | 110 | 160 | 5   | 8   | 31,3 | 13   | 135  |     |
|               | 71 B5       | 14     | 9     | 83  | 30  | 130 | 110 | 160 | 6   | 5   | 16,3 | 15   | 160  |     |
|               | 80 B5       | 19     | M10   | 83  | 40  | 165 | 130 | 200 | 6   | 6   | 21,8 | 15   | 160  |     |
|               | 90 B5       | 24     | M10   | 83  | 50  | 165 | 130 | 200 | 6   | 8   | 27,3 | 15   | 160  |     |
|               | 100-112 B5  | 28     | M12   | 83  | 60  | 215 | 180 | 250 | 6   | 8   | 31,3 | 15   | 160  |     |
| 200           | 100-112 B14 | 28     | 9     | 83  | 60  | 130 | 110 | 160 | 6   | 8   | 31,3 | 15   | 160  |     |
|               | 90 B5       | 24     | 11    | 100 | 50  | 165 | 130 | 200 | 6   | 8   | 27,3 | 23   | 220  |     |
|               | 100-112 B5  | 28     | M12   | 100 | 60  | 215 | 180 | 250 | 6   | 8   | 31,3 | 23   | 220  |     |
|               | 132 B5      | 38     | M12   | 100 | 80  | 265 | 230 | 300 | 6   | 10  | 41,3 | 23   | 220  |     |
| 250           | 132 B14     | 38     | 11    | 100 | 80  | 165 | 130 | 200 | 6   | 10  | 41,3 | 23   | 220  |     |
|               | 132 B5      | 38     | M12   | 125 | 80  | 265 | 230 | 300 | 6   | 10  | 41,3 | 25   | 250  |     |
|               | 132 B14     | 38     | 11    | 125 | 80  | 165 | 130 | 200 | 6   | 10  | 41,3 | 25   | 250  |     |
|               | 160 B5      | 42     | M16   | 125 | 110 | 300 | 250 | 350 | 6   | 12  | 45,8 | 25   | 250  |     |

\* Modello XMRX: versione in acciaio inossidabile

Per le dimensioni non quotate si faccia riferimento agli schemi di pagina 204



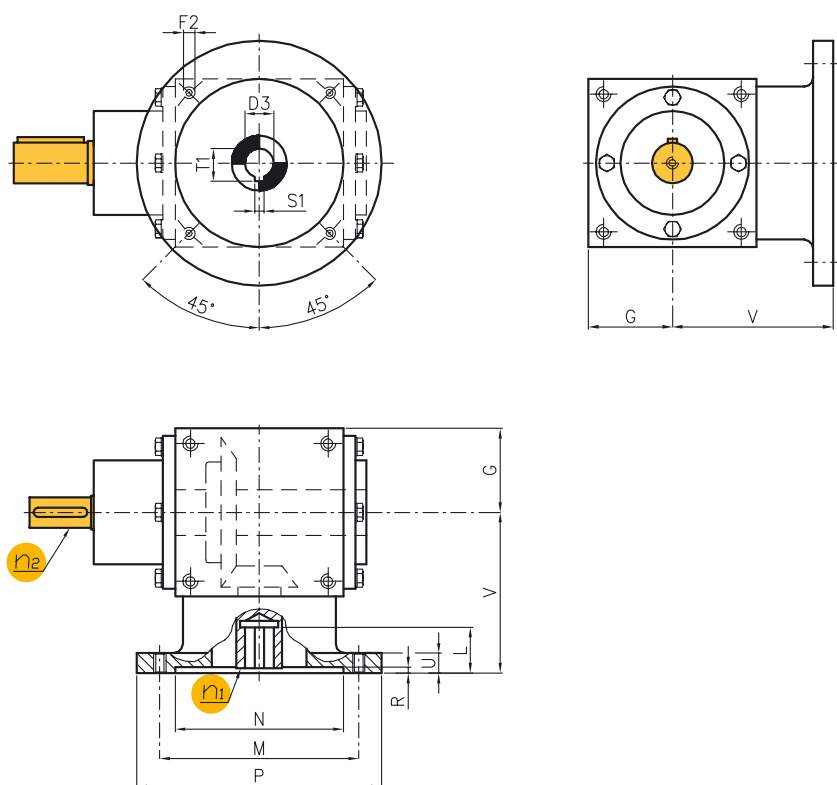

### Forme costruttive di base:

rapporto: 1/1



MS31

rapporto: 1/1,5 - 1/2 - 1/3 - 1/4



MS32

### Motorinvio a due mozzi con alberi rinforzati MRZ

| Grandezza     | Flangia IEC | D3 H7  | F2    | G   | L   | M   | N   | P   | R   | S1  | T1   | U    | V    |     |
|---------------|-------------|--------|-------|-----|-----|-----|-----|-----|-----|-----|------|------|------|-----|
| Modelli XMRZ* | 86          | 56 B5  | 9     | M6  | 43  | 23  | 100 | 80  | 120 | 4   | 3    | 10,4 | 13   | 90  |
|               |             | 63 B5  | 11    | M8  | 43  | 23  | 115 | 95  | 140 | 4   | 4    | 12,8 | 13   | 90  |
|               |             | 71 B5  | 14    | M8  | 43  | 30  | 130 | 110 | 160 | 4   | 5    | 16,3 | 13   | 90  |
|               |             | 71 B14 | 14    | 7   | 43  | 30  | 85  | 70  | 105 | 4   | 5    | 16,3 | 13   | 90  |
|               |             | 80 B5  | 19    | M10 | 43  | 40  | 165 | 130 | 200 | 4   | 6    | 21,8 | 13   | 100 |
|               |             | 80 B14 | 19    | 7   | 43  | 40  | 100 | 80  | 120 | 4   | 6    | 21,8 | 13   | 100 |
|               | 110         | 63 B5  | 11    | M8  | 55  | 23  | 115 | 95  | 140 | 4   | 4    | 12,8 | 13   | 105 |
|               |             | 71 B5  | 14    | M8  | 55  | 30  | 130 | 110 | 160 | 4   | 5    | 16,3 | 13   | 105 |
|               |             | 71 B14 | 14    | 7   | 55  | 30  | 85  | 70  | 105 | 4   | 5    | 16,3 | 13   | 105 |
|               |             | 80 B5  | 19    | M10 | 55  | 40  | 165 | 130 | 200 | 4   | 6    | 21,8 | 13   | 105 |
|               |             | 80 B14 | 19    | 7   | 55  | 40  | 100 | 80  | 120 | 4   | 6    | 21,8 | 13   | 105 |
|               |             | 134    | 71 B5 | 14  | M8  | 67  | 30  | 130 | 110 | 160 | 5    | 5    | 16,3 | 13  |
|               | 80 B5       |        | 19    | M10 | 67  | 40  | 165 | 130 | 200 | 5   | 6    | 21,8 | 13   | 125 |
|               | 80 B14      |        | 19    | 7   | 67  | 40  | 100 | 80  | 120 | 5   | 6    | 21,8 | 13   | 125 |
|               | 90 B5       |        | 24    | M10 | 67  | 50  | 165 | 130 | 200 | 5   | 8    | 27,3 | 13   | 125 |
|               | 90 B14      |        | 24    | 9   | 67  | 50  | 115 | 95  | 140 | 5   | 8    | 27,3 | 13   | 125 |
| 100-112 B5    | 28          |        | M12   | 67  | 60  | 215 | 180 | 250 | 5   | 8   | 31,3 | 13   | 135  |     |
| 100-112 B14   | 28          |        | 9     | 67  | 60  | 130 | 110 | 160 | 5   | 8   | 31,3 | 13   | 135  |     |
| 166           | 71 B5       | 14     | 9     | 83  | 30  | 130 | 110 | 160 | 6   | 5   | 16,3 | 15   | 160  |     |
|               | 80 B5       | 19     | M10   | 83  | 40  | 165 | 130 | 200 | 6   | 6   | 21,8 | 15   | 160  |     |
|               | 90 B5       | 24     | M10   | 83  | 50  | 165 | 130 | 200 | 6   | 8   | 27,3 | 15   | 160  |     |
|               | 100-112 B5  | 28     | M12   | 83  | 60  | 215 | 180 | 250 | 6   | 8   | 31,3 | 15   | 160  |     |
|               | 100-112 B14 | 28     | 9     | 83  | 60  | 130 | 110 | 160 | 6   | 8   | 31,3 | 15   | 160  |     |
| 200           | 90 B5       | 24     | 11    | 100 | 50  | 165 | 130 | 200 | 6   | 8   | 27,3 | 23   | 220  |     |
|               | 100-112 B5  | 28     | M12   | 100 | 60  | 215 | 180 | 250 | 6   | 8   | 31,3 | 23   | 220  |     |
|               | 132 B5      | 38     | M12   | 100 | 80  | 265 | 230 | 300 | 6   | 10  | 41,3 | 23   | 220  |     |
|               | 132 B14     | 38     | 11    | 100 | 80  | 165 | 130 | 200 | 6   | 10  | 41,3 | 23   | 220  |     |
| 250           | 132 B5      | 38     | M12   | 125 | 80  | 265 | 230 | 300 | 6   | 10  | 41,3 | 25   | 250  |     |
|               | 132 B14     | 38     | 11    | 125 | 80  | 165 | 130 | 200 | 6   | 10  | 41,3 | 25   | 250  |     |
|               | 160 B5      | 42     | M16   | 125 | 110 | 300 | 250 | 350 | 6   | 12  | 45,8 | 25   | 250  |     |

\* Modello XMRZ: versione in acciaio inossidabile

Per le dimensioni non quotate si faccia riferimento agli schemi di pagina 205